


### PARTS LIST

ITEMS	DESCRIPTION	REF. DATA	REQ.
1	GRID	COPPER NICKEL ALLOY (T11)	1
2	GAGE LEAD	POLYURETHANE WIRE φ0.14 × 300mm	2
3	BASE	POLYIMIDE	1
4	COVER	POLYIMIDE	1
5	LEAD WIRE	7/0.05 500mm (RED) AWG36	2

### SPECIFICATION

RESISTANCE : 119.7Ω ± 0.3Ω  
 : 120.3Ω ± 0.3Ω  
 GAGE LENGTH : 1mm  
 GAGE FACTOR : 1.8~2.1  
 TEMPERATURE RANGE : -50℃ to 70℃

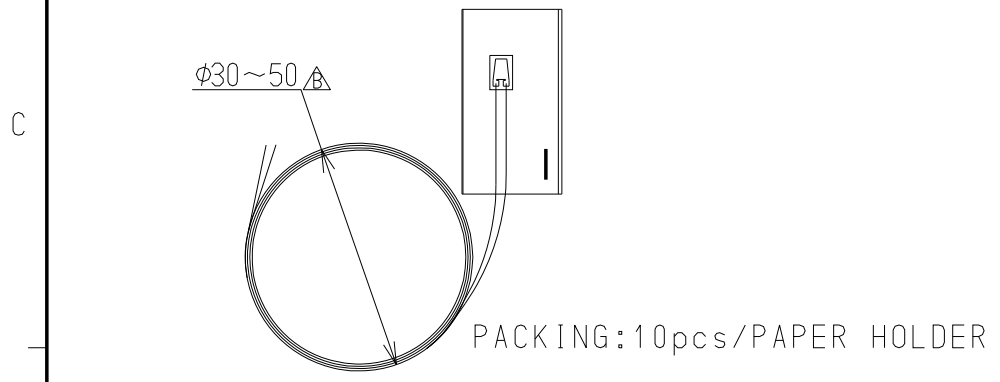

					<b>ミネベア株式会社</b> MINEBEA CO.,LTD. <b>計測機器事業部</b>			単位 UNIT mm 尺度 SCALE	材質 MATERIAL 表面粗さ SURF.ROUGH. 熱処理 HEAT TREAT. 表面処理 FINISH	作成日 DATE 2004.8.21 品名 DESCRIPTION <b>J-1-12L30+05MS</b> 品番 PART NO. (MODEL NO.) 葉番 SHEET 図番 DRAWING NO. G900224-1 改訂 REV. D
D	2009.02.23	KN09-0055	Kurashima	D.Ina				一般公差 TOL 寸法 L 公差 <L ≤ 4 ±0.1 4 < L ≤ 16 ±0.2 16 < L ≤ 63 ±0.3 63 < L ≤ 250 ±0.5 250 < L ≤ 1000 ±0.8 角度 DEG ±0.5	表面処理 FINISH	葉番 SHEET
C	2005/07/14	KN05-0262	HIRAMOTO	D. INA						
B	2004/10/12	KN04-0346	D. Ina	Misaizu	APPROVED	CHECKED	DRAWN			
A	2004/09/07	KN04-0313 (TO ENGLISH)	D. Ina	D. Ina	D. Inomori	E. MISAIZU	D. Inomori			
符号 MARK	日付 DATE	ECN NO.	担当 ENGINEER	承認 APPROVED						